


## Applications: Rates of Change

(covers Stewart 3.7)

Suppose a particle (i.e. a dot) is moving along a coordinate line, and its position is given by  $s(t)$ .



Position:  $s(t)$  (here, position can also be interpreted as displacement relative to 0)

Velocity:  $v(t) = s'(t)$

Acceleration:  $a(t) = v'(t) = s''(t)$

**Note:** Velocity can be positive or negative. Positive means movement to right, negative means movement to left. The speed of the particle, however, is always positive, and is given by  $|v(t)|$ .

**Ex 1.**

The position of a particle is given by the equation  $s(t) = t^3 - 6t^2 + 9t$  (where  $t \geq 0$  is measured in seconds and  $s$  is measured in meters).

Find the velocity at time  $t$ .

$$v(t) = s'(t) = 3t^2 - 12t + 9$$

What is the velocity after 2 seconds?

$$v(2) = 3(2)^2 - 12(2) + 9 = -3 \text{ m/s}$$

When is the particle at rest?

(When is  $v(t) = 0$ ?)

$$3t^2 - 12t + 9 = 0$$

$$t^2 - 4t + 3 = 0$$

$$(t-1)(t-3) = 0$$

$$t = 1 \text{ sec} \quad t = 3 \text{ sec}$$

When is the particle moving in the positive direction?


(When is  $v(t) > 0$ ?)

$$3t^2 - 12t + 9 > 0$$

$$3(t^2 - 4t + 3) > 0$$

$$3(t-1)(t-3) > 0$$

$$\begin{array}{cc} \uparrow & \uparrow \\ t=1 & t=3 \end{array}$$

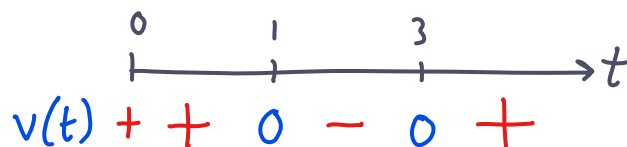

$$0 \leq t < 1, t > 3$$

$$\begin{array}{ll} \underline{t=2:} & \underline{t=0:} \\ v(2) = (+)(+)(-) & v(0) = 3(0-1)(0-3) \\ = (-) & = 3(-1)(-3) \\ & = (+)(-)(-) \\ & = (+) \\ \underline{t=4:} & \\ v(4) = (+)(+)(+) = (+) & = (+) \end{array}$$

Sketch a diagram to represent the motion of the particle.

Find the total distance traveled during the first 5 seconds.

Find the acceleration at time  $t$  and after 3 seconds.

When is the particle speeding up? When is it slowing down?

## Geometry


### Ex 2.

How fast is the area of a circle changing with respect to the radius when the radius is 5 cm?

## Density

Suppose you have a wire or rod of length  $L$  and mass  $m$ . If the mass is evenly distributed, then the linear density is  $\rho = \frac{m}{L}$  (where the units might be something like  $\frac{kg}{m}$ ).

But what if the mass is not evenly distributed? Suppose we have a function for the mass of the wire from 0 to  $x$ , call it  $m(x)$ .

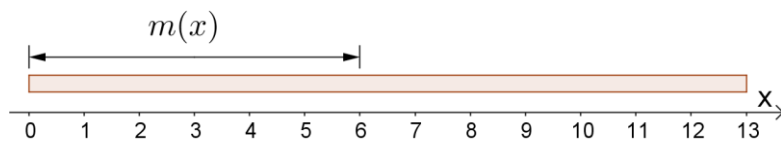

Based on this, how can we determine the linear density at any given point on the wire?

### Ex 3.

The mass of a wire from the left end to a point  $x$  cm to the right is  $\sqrt{x}$  grams. Find the linear density when  $x$  is 3 cm.